


**Plan View**

Provide neoprene gasket between stainless steel base and glass globe.

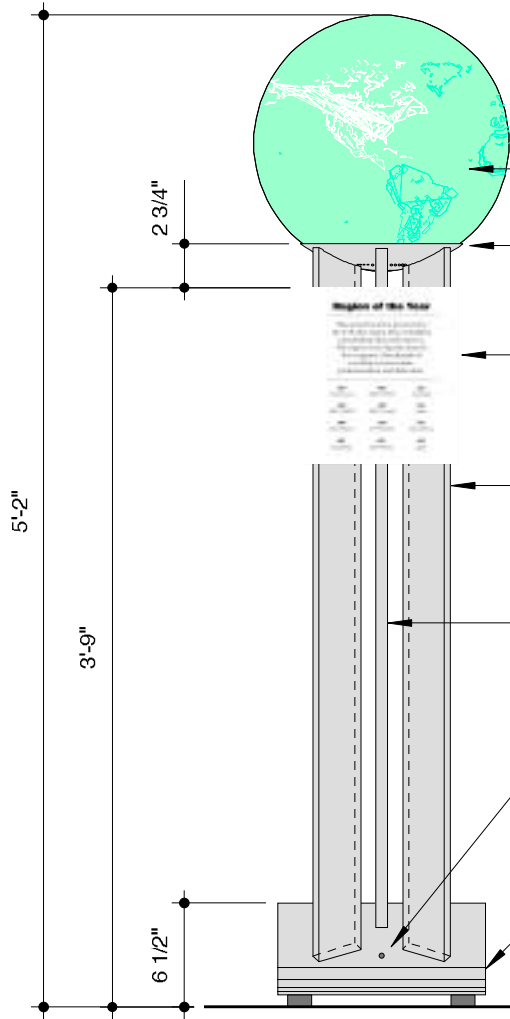

**Front View**

16" Ø glass globe with etched continents.

Compact fluorescent lamp illuminates interior of globe.


9.5" x 11" stainless steel plaques with etched and filled chronology of winners.

3/4" x 2 1/2" rectangular stainless steel tubes support globe.

Power for lamp contained within rear column.

Honeywell motion sensor concealed within base. Provide override for constant illumination if desired.

Stainless steel base with #4 finish. All welds to be seamless and ground smooth.

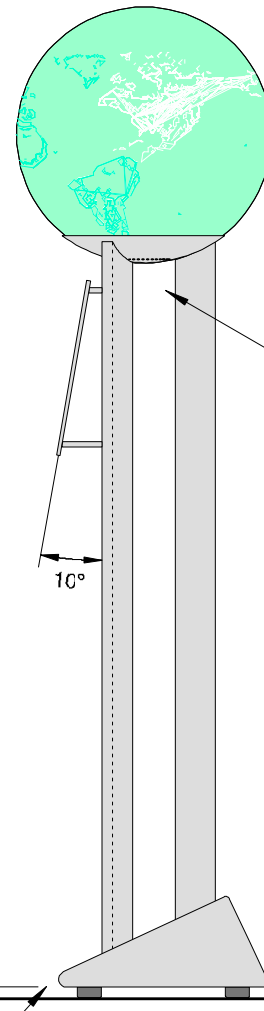

**Side View**

Provide a minimum of 36 1/8" diameter ventilation holes at base.

Power cord w/ strain relief.